

Lab-Scale Electrospinning Machine (Electroris)

Electroris® is a lab-scale electrospinning machine to prepare polymeric/carbon/ceramic nanofibers with diameter range of 50 nm to a few microns. The machine mainly consists of metallic body, syringe pump, spinneret system, collector system and high voltage power supply.

Two different types of Electroris are available: Standard and dual pump model (Side by Side Electroris).

In side by side Electrospinning system, there are two syringe pumps on both sides of the rotating collector drum, making the system to consist of 2 syringe pumps, 2 scan systems, 2 distance adjusters and 2 high voltage power supplies. In these systems two different materials could be electrospun simultaneously. Furthermore, the system makes it possible to electrospin polymeric material from one side and additive materials, such as medications, from the opposite side, producing composite nanofibers containing desired components. Therefore, it is suitable for pharmaceutical, medicinal and biological applications. This machine employs a touch screen panel for controlling electrospinning parameters. Electroris® provides excellent safety schemes for the users with respect to the handling of high voltage power supply and chemical solvents.



Main Features

- Advanced safety features
- Reliable performance
- Modular design
- 4.3" touch screen HMI panel for controlling process parameters
- Emergency button to stop machine in any unexpected situation
- Easy use and maintenance
- Dual syringe pump model is available
- Core-Shell nanofibers can be produced by coaxial nozzle.

General

Chassis: Metallic body with 3 doors for easy access

Input power: 100-240 V AC/50-60 Hz

Ventilation: A programmable fan adjustable by HMI panel

Heating system: Adjustable from room temperature up to 45°C via HMI panel

Heater: 1000W, 4A

Safety: Voltage cut-off in case of door opening, grounding problem, or process disruption

Dimensions (L×W×H): Standard: 88 × 76 × 87 cm;

Dual pump: 131 × 80 × 96 cm

Weight: Standard: 100 kg; Dual pump: 140 kg

Spinneret

Number of syringes: Standard: 1 or 2; Dual pump: Up to 4 syringes

Configuration: Horizontal (No need for hose)

Scanning rate: 0-30 mm/s

Scanning range: 0-30 cm

Syringe pump injection rate: 10 µl/h to 500 ml/h

Usable syringe size: 1-25 mm (Inner Diameter)

Accessories (Optional): Co-axial nozzle with tube

Dual pump series:

- 2 syringe pumps (Up to 4 syringes can be used)
- 2 scan systems
- 2 distance adjuster

Collector

Type: Rotating drum (wire, cylinder, mandrel and disk collectors are optional)

Material: Stainless steel

Rotation speed: 300-3000 RPM

Spinning distance: 5-20 cm

Size:

Drum: 8(ø) cm × 30(L) cm

Plate: 25(L) cm × 20(W) cm

Wire (Optional): 8(ø) cm × 25(L) cm

Disk (Optional): Diameter: 19.8 cm

Mandrel (Optional): Length: 25 cm; Diameter: 2, 4, 6, 8 and 10 mm

Attachable to negative high voltage power supply up to -20 kV (Optional)

High voltage power supply

Model: HV35P OV

Max. output voltage: 35 kV

Power: 35 watt

Voltage monitoring: Digital, Accuracy: 0.1 kV

Body: Durable metal casing

Two high voltage power supplies are installed for dual pump series


Control

Type: PLC


HMI: 4.3" touch screen

Control:

- Start and end position of the nozzle(s)
- Injection rate of syringe pump(s)
- Electrospinning distance(s)
- Electrospinning time
- ON/OFF timer for exhaust fan
- Drum ON/OFF switch (RPM controller) in standard series, and RPM control from HMI in dual pump series
- Temperature control
- Humidity indicator (dual pump series)
- Alarm after desirable volume of injection and after finishing the solution in syringe (after the operation of syringe pump switch)

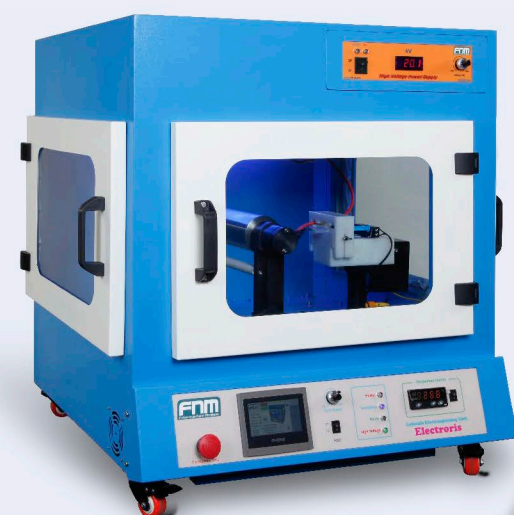

Single pump electrospinning machine

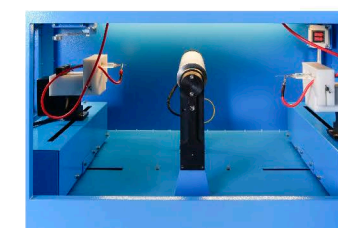

Dual pump electrospinning machine